

## Repeaters/network tuners

### Model number

AC461091A  
AC465026A (DIN)



### AS-Interface repeater

The AS-Interface repeater extends the AS-Interface network by 100 meters. The repeater requires no configuration and has no address on the bus. The repeater requires an AS-Interface power supply.




### Specifications


Operating voltage	AS-Interface voltage
Operating current	60mA (per segment) 120mA total
AS-Interface cycle time	0.15ms X (AS-i Slaves +1)
Indication	Green LED indicates bus power on each segment
Dimensions (L, W, H)	75mm, 28mm, 47mm
Operating temperature	-40° to +80°C (-40° to 176°F)




### Dimensions (mm)

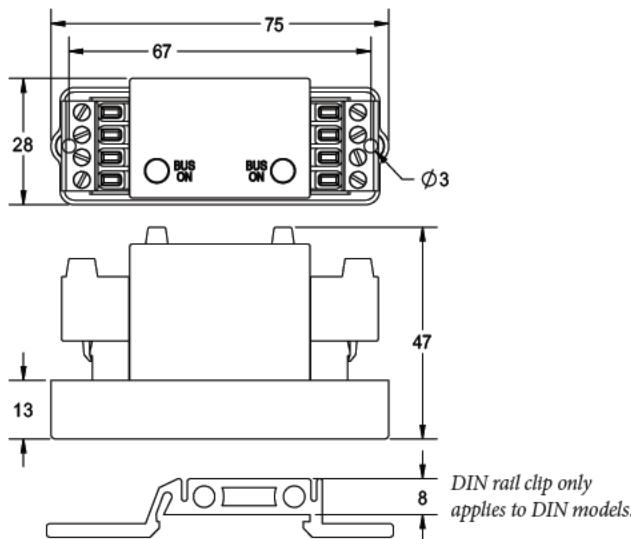


### Network

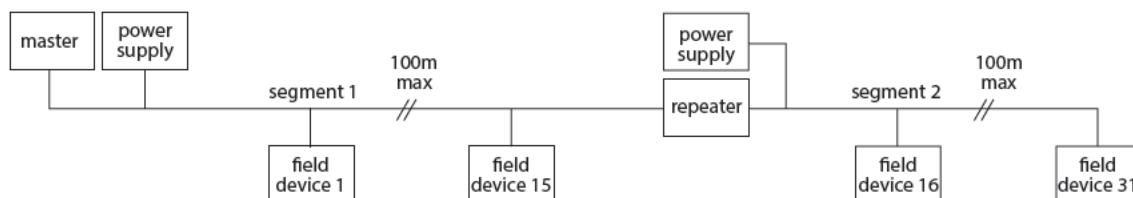

### Schematic drawing

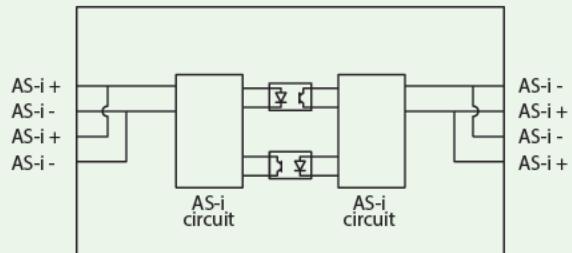

### Wiring diagram

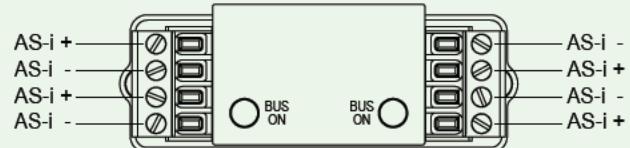



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

#### **Valmet Flow Control Oy**

Vanha Porvoontie 229  
01380 Vantaa, Finland  
[flowcontrol@valmet.com](mailto:flowcontrol@valmet.com)  
+358 10 417 5000  
[valmet.com/flowcontrol](http://valmet.com/flowcontrol)

#### **Valmet Flow Control Inc. Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.  
Tel. +1 218 739 5774.  
[sales.stonel@valmet.com](mailto:sales.stonel@valmet.com)  
[valmet.com/flowcontrol](http://valmet.com/flowcontrol)