

Cable and wiring

Model number
CB463002A




AS-Interface bus cable

This cable is selected for its rugged design and specifications favorable for use with the AS-Interface communication protocol. The cable is constructed of sunlight resistant PVC and is UL type Power Limited Tray Cable (PLTC).

Kit contents

- Two (2) conductor cable for AS-Interface networks
- Rugged PVC construction
- UL type PLTC

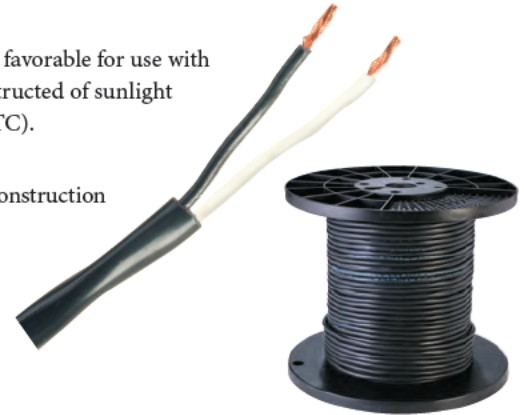

Specifications	
Conductors	2 (stranded copper)
Length	100m (328')
Wire gauge	16 AWG
Max voltage	300 V RMS
DC resistance	0.012 ohms/m (@ 20°C)
Nominal capacitance	65.6 pF/m (@ 1kHz)
Nominal inductance	0.59 µH/m
Jacket material	sunlight resistant PVC
Max pulling tension	71.4 lbs
Cable diameter	6mm
Applicable specifications	UL type PLTC, ITC, CMG, CL2, CL3 C(UL) CMG, FT4
Weight	6.4 kg (14 lbs)



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

Valmet Flow Control Oy

Vanha Porvoontie 229
01380 Vantaa, Finland
flowcontrol@valmet.com
+358 10 417 5000
valmet.com/flowcontrol

**Valmet Flow Control Inc.
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.
Tel. +1 218 739 5774.
sales.stonel@valmet.com
valmet.com/flowcontrol

