

Cable and wiring

Model number
CCAS1EA-2M
CCAS1EA-4M
CCAS1EA-6M



AS-Interface cordsets

These single ended female cordsets allow for quick connection using a convenient micro (M12) connector.

CCAS1EA-2M single ended female cordset (2 meters)
 CCAS1EA-4M single ended female cordset (4 meters)
 CCAS1EA-6M single ended female cordset (6 meters)



Specifications	
Conductors	2x 18AWG
Insulation material	PVC
Insulation color	Black
Coupling nut	Stainless steel
Rated voltage	250V
Rated current	4.0A
Contact material/plating	Brass/gold
Operating temperature	-40° to +105°C (-40° to +221°F)
Ratings	Meets NEMA 1, 3, 4, 6P and IEC IP68

Pinout drawing




female (sockets)

Pins

- 1 AS-i + (brown)
- 2 N/C
- 3 AS-i - (blue)
- 4 N/C

Dimensions (mm)

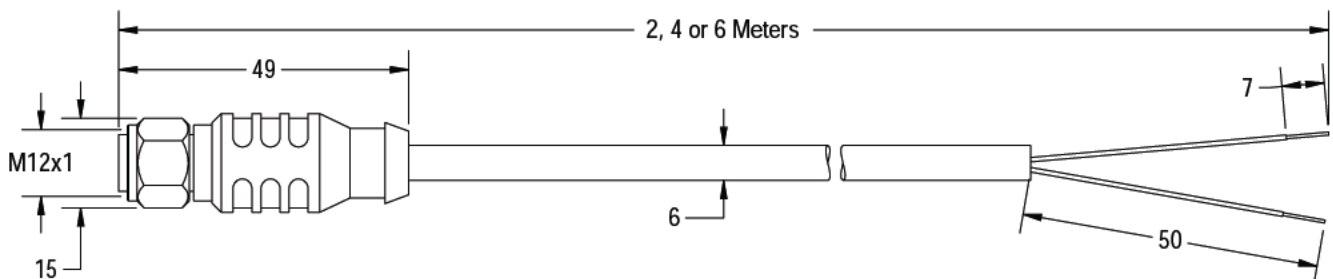



Valmet's professionals around the world work close to our customers and are committed to moving our customers' performance forward – every day.

Valmet Flow Control Oy

Vanha Porvoontie 229
01380 Vantaa, Finland
flowcontrol@valmet.com
+358 10 417 5000
valmet.com/flowcontrol

**Valmet Flow Control Inc.
Stonel product center**

26271 US Hwy 59, Fergus Falls, MN 56537 USA.
Tel. +1 218 739 5774.
sales.stonel@valmet.com
valmet.com/flowcontrol

